

06/28/00
jc820 U.S. PTO

OSTROLENK, FABER, GERB & SOFFEN, LLP
Attorneys at Law
1180 Avenue of the Americas
New York, New York 10036-8403
(212) 382-0700

Telex
23 6925
Facsimile
(212) 382-0888
Cable
Ostrofaber NewYork

A
jc808 U.S. PTO
06/28/00
06/28/00

Express Mail #EL008134326US

Asst. Commissioner for Patents
Washington, DC 20231

OFGS File No. : P/2635-48
Inventor : Shigeru ONO
Title : CDMA RECEIVER CAPABLE OF ESTIMATION OF FREQUENCY
OFFSET IN HIGH PRECISION
Assignee : NEC Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

- 63 Pages of Specification including Abstract and Claims
- 21 Numbered Claims Calculated as 21 Claims for Fee Purposes
- 8 Sheets of Drawing Containing Figures 1 to 8E.
- X Declaration and Power of Attorney
- X Priority is Claimed under 35 U.S.C. §119:
- Convention Date June 29, 1999 for Japan Appln. S.N. 11-184099
- X Certified Priority Application
- X PTO-1449 with 7 references
- X Assignment
- X Return-Addressed Post Card


OFGS Check No. 95250, which includes the fee of \$904.00, calculated as follows:

Basic Filing Fee:	\$ 690.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$18:	18.00
Number of Independent Claims in Excess of 3, times \$78:	156.00
One or More Multiple Dependent Claims: Total \$260.	
Total Filing Fees or	864.00
Total Filing Fee Reduced 50% for Small Entity:	
Assignment Recording Fee: \$40	40.00
TOTAL Filing Fee and Assignment Recording Fee:	\$ 904.00


In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL008134326US) in an envelope addressed to: Asst. Commissioner for Patents, Washington, D.C. 20231, on June 28, 2000:

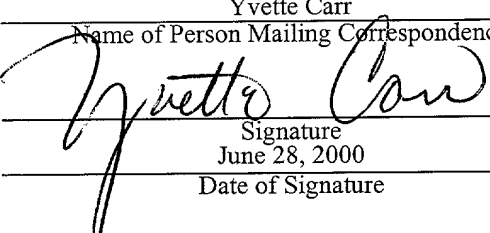Yvette Carr
Name of Person Mailing Correspondence

Signature
June 28, 2000
Date of Signature

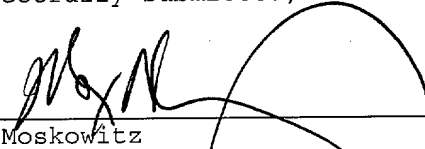Respectfully submitted,


Max Moskowitz
Registration No.: 30,576
OSTROLENK, FABER, GERB & SOFFEN, LLP
1180 Avenue of the Americas
New York, New York 10036-8403
Telephone: (212) 382-0700

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

5 1. Field of the Invention

2. Description of the Related Art

In a code division multiple access (CDMA) system using a spectrum spreading process, data symbols to be transmitted are spread in accordance with a spreading code having a rate higher than a symbol rate. Channels to be multiplexed have different spreading codes and their symbol rates are varied depending on a data rate in transmission. To realize a variable symbol rate without changing a chip rate, a spreading code length per symbol (to be referred to as a spreading rate, hereinafter) shall be controlled. It should be noted that the symbol is a unit for data modulation before the spectrum spreading process is carried out. When the data modulation system is QPSK, one symbol represents

a combination of one bit of an in-phase component and one bit of an orthogonal component. That is, the symbol can be expressed by a complex number.

For receiving a spectrum spread signal at high accuracy, it is essential to carry out synchronization detection. For this purpose, it is necessary at a receiver that the frequency of a local signal applied for down-converting an RF (radio frequency) signal to a baseband signal is equivalent to the frequency of a carrier signal from a transmitter. If there is a discrepancy in frequency, i.e., a frequency offset between the local signal at the receiver and the carrier signal at the transmitter, the frequency offset appears on the baseband signal. The frequency offset will cause a timing error in the baseband signal processing or degradation of the S/N ratio after inverse spreading of spectrum, resulting in degrading the quality of a received signal. Particularly, in the CDMA system, the inverse spreading of spectrum of the received signal can not be correctly carried out due to the discrepancy for one chip. Degradation of the S/N ratio after the inverse spreading of spectrum may lead to deterioration of the anti-interference property. Therefore, the development of a higher accuracy automatic frequency controlling system

For example, according to a synchronization establishing process of the IMT-2000 technology recommended for international mobile

5 telecommunications, scramble codes on a perch
channel are divided to a limited number of groups.
For quick acquisition of a cell, the scramble
code having a long period is transferred on the
channel and a short search code is inserted for
10 every time slot. Orthogonal gold codes are used
as the search codes, which are classified into
two types, a primary search code and a secondary
search code. These search codes are transferred
in parallel. The primary search code is a unique
15 code in the system while a plurality of codes are
transmitted in a sequence as the secondary code.
A mobile terminal receives the primary search
code peculiar to the terminal to establish the
symbol synchronization and the slot
20 synchronization. In this case, it is desired that
the synchronization with the primary search code
can be quickly established, and the
synchronization with the perch channel can be
established. Thus, the cell can be quickly
25 acquired through grouping on the basis of on the
scramble code.

Fig. 1 is a block diagram of a conventional

automatic frequency controlling apparatus. Fig. 1 shows not the entire structure of a receiver but a relevant section of an automatic frequency controlling process. Also, for simplification of the description, inversely spreading units are limited to two units and such a conventional automatic frequency controlling apparatus is then illustrated.

Referring to Fig. 1, an RF (radio frequency) signal, i.e., a high frequency signal from a transmitter received by an antenna is introduced to a frequency converter 201 via an input terminal 100. The frequency converter 201 receives a first local frequency signal from the first local frequency generator 202. A first local frequency signal is obtained by offsetting the frequency of a carrier signal from the transmitter by an IF frequency. The frequency converter 201 converts the RF signal into an IF (intermediate frequency) signal in accordance with the first local frequency signal. The IF signal is then adjusted to a predetermined signal level by an AGC unit 101 and transferred to an orthogonal demodulator 210. A second local frequency signal having an IF frequency is supplied from a second local frequency generator 203 to an orthogonal demodulator 210. In response

The path searching unit 260 determines a delay profile from the digital signals supplied from the A/D converters 103 to determine the timing for inverse spreading used in the inversely spreading units 220. The intervals for which the delay profile is calculated and the averaged length of the intervals are determined based on an instruction 301 from the controller 300. The path searching unit 260 outputs an inverse spreading timing to the inversely spreading units 220 based on the determined delay profile. Also, the path searching unit 260 determines how many effective multi-paths are present in the received digital signals and

The path searching unit 260 determines a delay profile from the digital signals supplied from the A/D converters 103 to determine the timing for inverse spreading used in the inversely spreading units 220. The intervals for which the delay profile is calculated and the averaged length of the intervals are determined based on an instruction 301 from the controller 300. The path searching unit 260 outputs an inverse spreading timing to the inversely spreading units 220 based on the determined delay profile. Also, the path searching unit 260 determines how many effective multi-paths are present in the received digital signals and

delivers its result 303 to the controller 300.

The inversely spreading units 220 receive a control signal 301 from the controller 300. The control signal 301 includes parameter data 301 such as a spreading code and symbol rate of the channel and boundary data of a pilot symbol interval. The inversely spreading units 220 inversely spread the digital signals received from the A/D converters 103 into symbol signals based on the inverse spreading timing received from the path searching unit 260 and the control signal 301. The symbol signals are transferred to pilot symbol inverse demodulators 230. In this conventional example, it is assumed that a pilot symbol signal and a data symbol signal are time-multiplexed in the symbol signal to have a QPSK transmission format, as illustrated in Fig. 2A.

A pilot symbol interval is inserted before a data symbol interval for every slot period having a predetermined interval called "a slot". A pilot symbol pattern in the pilot symbol interval in each slot period is variable. In this case, the symbol rate can be made variable by changing the spreading rate under a constant chip rate as shown in Fig. 2D. More specifically, the symbol interval in the symbol rate of $2 \cdot F_s$ is decreased to a half of the symbol interval in the

symbol rate of F_s , as shown in Fig. 2B and 2C.

It should be noted that the pilot symbol interval remains unchanged in the length when the symbol rate is varied in Figs. 2B and 2C. However, there generally is no such a limitation. The pilot symbol interval length may be varied depending on the symbol rate and is not the limitation essential to the present invention.

The controller 300 shown in Fig. 1 receives the number of effective paths 303 from the path searching unit 260. The controller 300 generates a reception channel data such as the spreading code, the symbol rate, and the number of pilot symbols or pilot symbol interval. Also, the controller 300 generates various parameters for frequency offset estimation such as the number of data for phase difference average summation and angle/frequency offset conversion factors. In addition, the controller 300 generates temperature compensated crystal oscillator (TCXO) control data such as a conversion table between frequency offset and TCXO control voltage and the validation or invalidation of an updating operation of frequency offset. The controller 300 supplies the reception channel data as the control signal 301 to the path searching unit 260, the inverse spreading units 220, the pilot symbol

inverse modulators 230 and a frequency offset estimator 250. Also, the controller 300 supplies the parameters for frequency offset estimation and a part of the TCXO control data such as the validation or invalidation of the updating operation of frequency offset to the frequency offset estimator 250 as the control signal 301 in addition to the reception channel data. Also, the controller 300 supplies the conversion table between frequency offset and TCXO control voltage to a TCXO controller 270 as the control signal 302.

Fig. 3A is a block diagram of the pilot symbol inverse demodulator 230. In the pilot symbol inverse demodulator 230, a controller 239 generates a generation control signal to the reference pilot symbol generator 232 in response to the control signal 301 from the controller 300. The reference pilot symbol generator 232 generates a pilot symbol pattern for a symbol rate and a concerned slot in response to the generation control signal to output to a pilot symbol inverse demodulator 233. The pilot symbol pattern for the symbol rate and the concerned slot necessary for the inverse demodulation. Thus, the length of the pilot symbol interval is determined based on the control signal 301. The

The addition synthesizer 240 complex adds the inversely modulated pilot symbol signals supplied from the two pilot symbol demodulators 230 by a complex adder 251 and outputs the result of the complex addition to the frequency offset estimator 250. The output of the addition synthesizer 240 is expressed as complex vectors.

The addition synthesizer 240 complex adds the inversely modulated pilot symbol signals supplied from the two pilot symbol demodulators 230 by a complex adder 251 and outputs the result of the complex addition to the frequency offset estimator 250. The output of the addition synthesizer 240 is expressed as complex vectors.

An example of the inverse demodulation is illustrated in Figs. 4A and 4B. Fig. 4A shows an example of four pilot symbols received. Fig. 4B illustrates a result of removal or cancellation
5 (or inverse demodulation) of the modulated component of each pilot symbol. When the modulated component of the pilot symbol has been removed, a fluctuation of the transmission path and a frequency offset are obtained at a point
10 after the inverse demodulation.

As shown in Fig. 3B, in the frequency offset estimator 250, a one-symbol delay unit 251 delays the complex vector by one symbol. A complex conjugate multiplier 252 carries out
15 complex conjugate multiplication of a complex vector outputted from the addition synthesizer 240 and the delayed complex vectors outputted from the one-symbol delay unit 251 to calculate a phase difference vector.

20 Next, based on the control signal 301 from the controller 300, the controller 259 supplies the number of vectors to be averaged and the execution or stop of the averaging operation to the averaging unit 253 and the symbol rate and
25 the execution or stop of the output of the frequency offset expression to the angle/frequency offset converter 255.

The phase difference vectors are then averaged by an averaging unit 253 based on the number of vectors which is designated from a controller 259 which operates based on the control signal 301. It should be noted that the averaging operation by the averaging unit 253 may be a simple summing average, a moving average, or a leak-factor based average. If the path searching unit 260 fails to find an effective path, the averaging operation is not carried out. It is determined based on the designation from the controller 259 which of the averaging operations is carried out or whether the averaging operation is carried out or not.

Next, the phase difference vector averaged by the averaging unit 253 is then converted by an angular converter 254 from the phase difference vector expression to an angular expression. The conversion from the phase difference vector expression to the angular expression can be implemented through arc tangent conversion ($\arctan(\text{imaginary part}/\text{real part})$) using an imaginary part and a real part of the phase difference vector. The angular expression is then transferred to an angle/frequency offset converter 255 where the angular expression is converted to a frequency offset expression in

The TCXO controller 270 has a function to control a voltage applied to the TCXO unit 200 in accordance with the frequency offset value supplied from the frequency offset estimator 250. More particularly, the control voltage applied to the TCXO unit 200 is determined in accordance with the frequency offset using the table designated by the controller 300. In this case, the control voltage applied to the TCXO unit 200 is selected such that the frequency offset is compensated. The control voltage determined by the TCXO controller 270 is a digital value and hence is converted to an analog value by a D/A converter 105 and transmitted via an LPF 102 to the TCXO unit 200.

The first local frequency generator 202 and

10 has the IF frequency.

20 estimation of the frequency offset become worse.

More specifically, in the CDMA system in whose frame format a pilot symbol and a data symbol are time multiplexed for transmission, and a variable transmission symbol rate is realized by making the spreading rate variable under a constant chip rate, the spreading rate decreases when the symbol rate increases. As a result, the

5 In conjunction with the above description,
a demodulating method with an adaptable phase
control is disclosed in Japanese Laid Open Patent
Application (JP-A-Heisei 5-207088). In this
reference, a phase control circuit (28) carries
10 out a complex weighting operation to a received
complex input signal U such that a square mean of
the difference between a desired signal and the
complex input signal is made the smallest. A
Wiener filter is formed using the phase control
15 circuit (28). A frequency compensating circuit
(44) carries out a frequency error estimation
based on a variation of a correlation value
between the complex input signal U and a
demodulation signal D for one symbol period. A
20 phase error estimating circuit (21) carries out
an initial phase error estimation based on the
frequency error estimation. A phase equalizing
circuit (22) carries out a phase equalizing
operation in consideration of a phase variation
25 due to the frequency error to fully remove a
stationary phase error due to a frequency offset
to a correct demodulation signal D.

Also, an accumulation collective demodulator for a K-phase PSK modulated signal is disclosed in Japanese Laid Open Patent Application (JP-A-Heisei 7-202964). In this

5 reference, a complex signal which has been subjected to a quasi-synchronization detection are sampled at a center point iT and a point $(i+r)T$ displaced from the center point to produce $(N+1)$ signals. The $(N+1)$ signals are stored in

10 memories (13 and 24). A estimating section (15) estimates an initial phase error $\theta 'n$, and a frequency error $\Delta \omega '$ from the signals inputted to the memory (13). Local oscillators (25 and 26) generate local signals $\exp[-j\{\theta '0 + (\Delta \omega ' + 2k\pi$

15 $/KT)iT\}]$ and $\exp[-j\{\theta '0 + (\Delta \omega ' + 2k\pi /KT)(i+r)T\}]$, respectively. Multipliers (17 and 28) complex multiply the local signals with the signals stored in the memories (13 and 24), respectively. A pattern jitter is removed from the output of

20 the multiplier (28) by a filter (29). An estimating section (27) determines variance of distance from the output of the multiplier (17). The output of the multiplier (17) for k when the variance becomes the least is supplied to the

25 demodulator.

Also, a prediction type synchronization detection apparatus is disclosed in Japanese Laid

Open Patent Application (JP-A-Heisei 8-130565).
In this reference, reception signals $y_s(i)$ which
are sampled for every symbol period T are
inversely modulated by means (27) into a complex
5 symbol sequence candidates $am(i)$ to $am(i-L)$ (L :
is a natural number and $L=3$ in the figure) to
obtain an inverse modulation signal sequence
 $zm(i)$ to $zm(i-L)$. The inverse modulation signal
sequence $zm(i-1)$ to $zm(i-L)$ are weighted and
10 synthesized to produce a front prediction value.
Thus, the front prediction error $\alpha_{fm}(i)$ is
determined to indicate the difference between the
front prediction value and $zm(i)$. The inverse
modulation signal sequence $zm(i)$ to $zm(i-L+1)$ are
15 weighted and synthesized to a back prediction
value. Thus, a back prediction error $\alpha_{bm}(i)$ is
determined to indicate the difference between the
back prediction value and $zm(i-L)$. The maximum
likelihood estimation is carried out by a maximum
20 likelihood sequence estimating circuit 32 to the
summation of squares of each of absolute values
of $\alpha_{fm}(i)$ and $\alpha_{bm}(i)$ as the likelihood data and
outputs $am(i)$ to $am(i-L)$ and a determination
signal. A parameter estimating circuit (47)
25 inputs $zm(i)$ to $zm(i-L)$, $\alpha_{fm}(i)$, $\alpha_{bm}(i)$ and
estimates a weight coefficient for producing a
prediction value. In this way, characteristic

degradation due to a carrier frequency offset and a fading variance can be improved.

Also, a digital mobile radio communication system is disclosed in Japanese Laid Open Patent Application (JP-A-Heisei 9-93302). In this reference, two pilot symbols are provided for one frame. The phase differences between two pilot symbols are added and averaged over a plurality of frames. Thus, a compensation value of a frequency offset is determined to compensate for the frequency offset. In this way, influence due to the frequency offset between a receiver and a transmitter can be reduced in the digital mobile radio system to improve a transmission performance.

Also, a method of receiving a spectrum spread signal and a spectrum spread signal receiving apparatus are disclosed in Japanese Laid Open Patent Application (JP-A-Heisei 11-41141). In this reference, calculation of correlation between a baseband component of a spectrum spread signal and a spreading code is carried out. Then, correlation calculation is carried out at the timing which is different from a timing between the spreading code and the baseband component by $1/2$ of a spreading code interval. The correlation calculation result at

5

10

15

20

25

5 from the signal outputted from the addition
synthesizer for correction.

2,771,757. This reference relates to the data demodulating circuit of the receiving apparatus for the spectrum spreading communication in which a signal which has been subjected to a spectrum spreading operation to an in-phase axis and an orthogonal axis in a direct spreading system is received using a pseudo-noise code in an in-phase axis and a pseudo-noise code in an orthogonal axis and the data is demodulated from the received signal. A receiving signal in the in-phase axis and a receiving signal in the orthogonal axis are multiplied by the pseudo-noise code in an in-phase axis and the pseudo-noise code in an orthogonal axis which correspond to a pilot signal which has been transmitted from a base station, respectively. The multiplication results are integrated. A correlation calculating unit circularly adds and averages the integration

result and calculates the correlation which includes a remaining phase difference data after the detection. A phase difference compensating unit compensates for the phase differences which are contained in the received signal in the in-phase axis and the received signal in the orthogonal axis using the phase difference data supplied from the correlation calculating unit.

10

Summary of the Invention

Therefore, an object of the present invention is to provide a receiver in a CDMA system in which a frequency offset can be estimated in a high precision.

15

Another object of the present invention a receiver in a CDMA system in which the S/N ratio of the complex vector can be increased.

20

Still another object of an automatic frequency controlling system in a CDMA system in whose frame format a pilot symbol and a data symbol are time multiplexed for transmission, and a variable transmission symbol rate is realized by making the spreading rate variable under a constant chip rate.

25

In order to achieve an aspect of the present invention, a receiver for a code division multiple access system includes a pilot symbol

producing section, a frequency offset estimating section and a local signal generating section. The pilot symbol producing section produces pilot symbols of complex vector expression from a
5 received radio frequency (RF) signal based on a first local frequency signal and a second local frequency signal. The first local frequency signal has a frequency obtained by shifting a frequency of a carrier signal by an IF frequency
10 and the second local frequency signal has a frequency equal to the IF frequency. The pilot symbols have been subjected to inverse modulation to remove a modulation component. The frequency offset estimating section carries out in-phase
15 adding operations to the pilot symbols of the complex vector expression over a predetermined interval in accordance with a predetermined pattern. Then, the frequency offset estimating section carries out a complex adding operation of
20 results of the in-phase adding operations, and determines a frequency offset from a result of the complex adding operation. The local signal generating section generates the first and second frequency signals based on the determined
25 frequency offset.

Here, the predetermined interval may be an interval longer than one symbol period.

Also, the frequency off set estimating section may include an in-phase adding section, an addition synthesizing section and a frequency offset estimating unit. The in-phase adding
20 section carries out the in-phase adding operations to the pilot symbols of the complex vector expression over the predetermined interval in accordance with the predetermined pattern. The addition synthesizing section carries out the
25 complex adding operation of the results of the in-phase adding operations. The frequency offset estimating unit determines the frequency offset

Also, the frequency off set estimating section may include an in-phase adding section, an addition synthesizing section and a frequency offset estimating unit. The in-phase adding
20 section carries out the in-phase adding operations to the pilot symbols of the complex vector expression over the predetermined interval in accordance with the predetermined pattern. The addition synthesizing section carries out the
25 complex adding operation of the results of the in-phase adding operations. The frequency offset estimating unit determines the frequency offset

In this case, the in-phase adding section includes a plurality of in-phase adding units, each of which may include a buffer memory, a

10 indicative of a number of pilot symbols to be added and an in-phase summing pattern. The in-phase adder reads out the pilot symbols of the complex vector expression from the buffer based on over the predetermined interval and the
15 predetermined pattern, and carries out the in-phase adding operation to the read out pilot symbols of the complex vector expression.

Also, the addition synthesizing section may include a complex adder which carries out the
20 complex adding operation of the results of the
in-phase adding operations.

Also, the frequency offset estimating unit may include a buffer memory, a complex conjugate multiplier, an averaging unit, an angle converter
25 and a converter. The buffer memory stores the result of the complex adding operation. The complex conjugate multiplier carries out a

based on a predetermined pattern; and by
generating the first and second frequency signals
based on the determined frequency offset.

Here, the predetermined interval may be an
5 interval longer than one symbol period.

Also, when the producing includes:
orthogonally demodulating the RF signal into an
in-phase component and an orthogonal component;
and producing a channel count data indicative of
10 a number of effective channels from the in-phase
component and the orthogonal component based on a
spreading code, a symbol rate and a pilot symbol
interval, the method may further include:
generating the addition count data indicative of
15 a number of pilot symbols to be added and an in-
phase summing pattern. Thus, the determining a
frequency offset is attained by determining the
predetermined interval and the predetermined
pattern based on the addition count data and the
20 in-phase summing pattern.

Also, the producing may be attained by
carrying out the in-phase adding operations to
the pilot symbols of the complex vector
expression over the predetermined interval in
25 accordance with the predetermined pattern; by
carrying out the complex adding operation of the
results of the in-phase adding operations; and by

determining the frequency offset from the result of the complex adding operation.

In this case, the carrying out the in-phase adding operations may be attained by storing the pilot symbols of the complex vector expression in a buffer memory for every in-phase adding operation; by generating the predetermined interval and the predetermined pattern based on an addition count data indicative of a number of pilot symbols to be added and an in-phase summing pattern; and by reading out the pilot symbols of the complex vector expression from the buffer based on over the predetermined interval and the predetermined pattern, to carry out the in-phase adding operation to the read out pilot symbols of the complex vector expression.

Also, the carrying out the complex adding operation may be attained by carrying out the complex adding operation of the results of the in-phase adding operations.

Also, the determining the frequency offset may be attained by storing the result of the complex adding operation in a buffer memory; by carrying out a complex conjugate multiplication of the result of the complex adding operation stored in the buffer memory to calculate phase difference vectors; by carrying out an averaging

operation to the phase difference vectors; by
converting the averaged phase difference vector
to an angle value; and by converting the angle
value to the frequency offset based on a symbol
5 rate.

In order to achieve still another aspect of
the present invention, an automatic frequency
controlling method in a code division multiple
access system using a spectrum spreading
10 technique which has a frame format in which pilot
symbols and data symbols are time multiplexed for
transmission and in which a variable transmission
symbol rate is realized by making a spreading
rate variable under a constant chip rate, is
15 attained by in-phase summing in at least two
different in-phase summation rates the pilot
symbols having a complex vector expression over a
predetermined length of a symbol interval after
converting the pilot symbols into the complex
20 vector expression by canceling a data modulated
component of the pilot symbols; and by estimating
a frequency offset based on a result of complex
conjugate multiplication of a plurality of the
complex vector expressions which are subjected to
25 the in-phase addition.

Also, the method may further include:
controlling an oscillation frequency of a crystal

5 intermediate frequency signal in accordance with
the oscillation frequency; and orthogonally
demodulating the intermediate frequency signal
based on the oscillation frequency.

Also, the automatic frequency controlling method may further include: obtaining a baseband signal having an in-phase component and an orthogonal component through the orthogonal modulation and converting into digital signals by A/D converters, respectively; inversely spreading the digital signals by inversely spreading units to separate the pilot symbols from the data symbols; and converting the pilot symbols into complex vector expressions by canceling the data modulated components of the pilot signals.

20 In order to achieve yet still another aspect of the present invention, an automatic frequency controlling system for demodulation in a code division multiple access system using a spectrum spreading technique which has a frame
25 format in which pilot symbols and data symbols are time multiplexed for transmission and in which a variable transmission symbol rate is

realized by making a spreading rate variable under a constant chip rate, includes:

an orthogonal demodulator converting a received signal into a baseband signal having an in-phase component and an orthogonal component; inversely spreading units for inversely spreading the in-phase component and the orthogonal component of the baseband signal; pilot symbol interval detectors separating the pilot symbols from the data symbols; inverse demodulating units for converting the pilot symbols into complex vector expressions by canceling data modulated components of the pilot symbols; an in-phase summing section in-phase summing in at least two different manners, the complex vector expressions of the pilot symbols over a predetermined length of the symbol section; and an estimating section estimating the frequency offset from complex conjugate multiplication of a plurality of the complex vector expressions which are subjected to the in-phase summation.

Also, the in-phase summing section in-phase summing in at least two different manners may include: a buffer memory for storing the symbols over at least two symbol intervals of the complex vector signal received from the demodulator; and an in-phase adder for in-phase summing the

Also, the automatic frequency controlling system may further include: a controlling section controlling the oscillation frequency of a crystal oscillator in accordance with an estimation of the frequency offset obtained through the estimation of the frequency offset; and a converting section converting the received frequency signal into an intermediate frequency signal in accordance with the oscillation frequency. At this time, the intermediate frequency signal is orthogonally demodulated using the oscillation frequency.

In order to another aspect of the present invention, a CDMA receiver in a code division multiple access system using a spectrum spreading technique which has a frame format in which pilot symbols and data symbols are time multiplexed for transmission and in which a variable transmission symbol rate is realized by making a spreading rate variable under a constant chip rate, includes: a mixer for converting a received frequency signal into an intermediate frequency signal; a first local frequency generator for supplying the mixer with a local oscillation signal; an orthogonal demodulator for orthogonally demodulating the intermediate frequency signal in accordance with a second local frequency of a second local frequency generator; inversely spreading units for converting in-phase components and orthogonal components of the baseband signal received from the orthogonal demodulator into analog/digital signals; pilot symbol demodulators for separating the inversely spread signal outputted from the inversely spreading units into pilot symbols and data symbols, and converting the pilot symbols into complex vector expressions by canceling the data modulated components of the pilot symbols; inversely demodulated pilot symbol in-phase

adders for in-phase summing in at least two different manners, the complex vector expressions of the pilot symbols over a predetermined length of the symbol section; a frequency offset
5 estimator for estimating the frequency offset based on complex conjugate multiplication of a plurality of the complex vector expressions which are subject to the in-phase summation; and a reference local frequency generator for
10 generating a reference local frequency based on the frequency offset and delivering the reference local frequency to the first and second local frequency generators.

15 **Brief Description of the Drawings**

Fig. 1 is a block diagram showing a conventional automatic frequency controlling apparatus;

20 Figs. 2A to 2D are diagram showing a frame format employed even in the present invention;

 Figs. 3A and 3B are a block diagram showing in more detail a pilot symbol inverse demodulator, an addition synthesizer, and a frequency offset estimator in the conventional apparatus of Fig.
25 1;

 Figs. 4A and 4B are diagrams showing in more detail an operation of the pilot symbol

Fig. 5 is a block diagram of a receiver in a CDMA system according to an embodiment of the present invention;

Fig. 7 is a block diagram showing in more
10 detail an addition synthesizer and a frequency
offset estimator in the apparatus of Fig. 5; and

15

Hereinafter, a receiver in a CDMA system of the present invention will be described below in detail with reference to the attached drawings.

Fig. 5 is a block diagram showing the structure of the receiver in the CDMA system according to an embodiment of the present invention. In this embodiment, a structure relating to an inverse demodulation pilot symbol in-phase adders 510, an addition synthesizer 520, a frequency offset estimator 530, and a controller 500 is added or modified compared with

the conventional system shown in Fig. 1. The other components are substantially identical to those of the conventional apparatus shown in Fig. 1. The blocks denoted by the same reference numerals as those shown in Fig. 1 are identical to those shown in Fig. 5 in the function and operation.

Referring to Fig. 1, an RF (radio frequency) signal, i.e., a high frequency signal from a transmitter received by an antenna is introduced to a frequency converter 201 via an input terminal 100. The frequency converter 201 receives a first local frequency signal from the first local frequency generator 202. A first local frequency signal is obtained by offsetting the frequency of a carrier signal from the transmitter by an IF frequency. The frequency converter 201 as a mixer converts the RF signal into an IF (intermediate frequency) signal in accordance with the first local frequency signal. The IF signal is then adjusted to a predetermined signal level by an AGC unit 101 and transferred to an orthogonal demodulator 210. A second local frequency signal having an IF frequency is supplied from a second local frequency generator 203 to an orthogonal demodulator 210. In response to the second local frequency signal, the

orthogonal demodulator 210 converts the IF signal into a baseband signal which has a component I along an in-phase axis and a component Q along an orthogonal axis. It is now assumed that QPSK modulation is employed. The in-phase component and the orthogonal component of the orthogonally demodulated signal are passed through two LPF units 202, respectively, and fed to A/D converters 103 which converts into their digital signals. Then, the converted digital signals are transferred to inversely spreading units 220 and a path searching unit 260.

The path searching unit 260 determines a delay profile from the digital signals supplied from the A/D converters 103 to determine the timing for inverse spreading used in the inversely spreading units 220. The intervals for which the delay profile is calculated and the averaged length of the intervals are determined based on an instruction 301 from the controller 300. The path searching unit 260 outputs an inverse spreading timing to the inversely spreading units 220 based on the determined delay profile. Also, the path searching unit 260 determines how many effective multi-paths are present in the received digital signals and delivers its result 303 to the controller 300.

The inversely spreading units 220 receives a control signal 301 from the controller 300. The control signal 301 includes parameter data 301 such as a spreading code and symbol rate of the channel and boundary data of a pilot symbol interval. The inversely spreading units 220 inversely spread the digital signals received from the A/D converters 103 into symbol signals based on the inverse spreading timing received from the path searching unit 260 and the control signal 301. The symbol signals are transferred to pilot symbol inverse demodulators 230. In this conventional example, it is assumed that a pilot symbol signal and a data symbol signal are time-multiplexed in the symbol signal to have a QPSK transmission format, as illustrated in Fig. 2A. A pilot symbol interval is inserted before a data symbol interval for every slot period having a predetermined interval called "a slot". A pilot symbol pattern in the pilot symbol interval in each slot period is variable. In this case, the symbol rate can be made variable by changing the spreading rate under a constant chip rate as shown in Fig. 2D. More specifically, the symbol interval in the symbol rate of $2 \cdot F_s$ is decreased to a half of the symbol interval in the symbol rate of F_s , as shown in Fig. 2B and 2C.

It should be noted that the pilot symbol interval remains unchanged in the length when the symbol rate is varied in Figs. 2B and 2C. However, there generally is no such a limitation. The
5 pilot symbol interval length may be varied depending on the symbol rate F_s .

The controller 500 shown in Fig. 5 receives the number of effective paths 303 from the path searching unit 260. The controller 500 generates
10 a reception channel data such as the spreading code, the symbol rate, and the number of pilot symbols or pilot symbol interval. Also, the controller 500 generates various parameters for frequency offset estimation such as the number of
15 data for phase difference average summation and angle/frequency offset conversion factors. In addition, the controller 500 generates temperature compensated crystal oscillator (TCXO) control data such as a conversion table between
20 frequency offset and TCXO control voltage and the validation or invalidation of an updating operation of frequency offset. In this case, the controller 500 supplies the reception channel data by the control signal 301 to the path
25 searching unit 260, the inverse spreading units 220, the pilot symbol inverse modulators 230 and a frequency offset estimator 530. Also, the

Fig. 6 illustrates the structure of the pilot symbol inverse demodulator 230 and the inversely demodulated pilot symbol in-phase adder 510. In the pilot symbol inverse demodulator 230, a controller 239 generates a generation control signal to the reference pilot symbol generator 232 in response to the control signal 301 from the controller 500. The reference pilot symbol generator 232 generates a pilot symbol pattern for a symbol rate and a concerned slot in response to the generation control signal to output to a pilot symbol inverse demodulator 233. The pilot symbol pattern for the symbol rate and the concerned slot necessary for the inverse demodulation. Thus, the length of the pilot symbol interval is determined based on the

Fig. 6 illustrates the structure of the pilot symbol inverse demodulator 230 and the inversely demodulated pilot symbol in-phase adder 510. In the pilot symbol inverse demodulator 230, a controller 239 generates a generation control signal to the reference pilot symbol generator 232 in response to the control signal 301 from the controller 500. The reference pilot symbol generator 232 generates a pilot symbol pattern for a symbol rate and a concerned slot in response to the generation control signal to output to a pilot symbol inverse demodulator 233. The pilot symbol pattern for the symbol rate and the concerned slot necessary for the inverse demodulation. Thus, the length of the pilot symbol interval is determined based on the

control signal 301. The QPSK symbol signal received from the inversely spreading unit 220 is separated by a pilot symbol interval detector 231 into pilot symbols in the pilot symbol interval
5 and data symbols in the data symbol interval based on a control signal from the controller 239. The length of the pilot symbol interval is determined based on designation through the control signal 301 from the controller 500. The
10 pilot symbols are delivered to a pilot symbol inverse demodulator 230. The data symbol is subjected to synchronization detection for demodulate the data received from the transmitter. The pilot symbol inverse demodulator 233 receives
15 the pilot symbol pattern from the reference pilot symbol generator 232 and cancels or removes a modulated component of the pilot symbol signal received from the pilot symbol interval detector 231 for demodulation to produce an inversely
20 modulated pilot symbol signal. The inversely demodulated pilot symbol signals are then transferred to an inversely modulated pilot symbol in-phase adder 510. The inversely demodulated pilot symbol signals are outputted to
25 the inversely modulated pilot symbol in-phase adder 510 in the form of a complex vector.

In the inversely modulated pilot symbol in-

phase adder 510, a controller 519 receives an in-phase summing pattern and the number of symbols to be in-phase summed through the control signal 304 from the controller 500. Also, the controller 519 instructs an in-phase summing pattern generator circuit 512 to control the operation of the buffer memory 513 and the in-phase adder circuit 511. The inversely demodulated pilot symbol signals from the pilot symbol inverse demodulator 230 are expressed in the form of a complex vector in units of symbols. The inversely demodulated pilot symbol signals are outputted to a buffer memory 513 in the inversely demodulated pilot symbol in-phase adder 510 and stored therein. A part of the complex vectors expressing the inversely demodulated pilot symbol signals is read out from the buffer memory 513. Then, the read out complex vectors are in-phase summed by an in-phase adder 511 based on a control signal by the controller 519 which operates in response to the control signal 304 from the controller 500. The result of the in-phase summation is delivered to an addition synthesizer 520.

As shown in Fig. 7, in the addition synthesizer 520, a complex adder 521 carries out a complex adding operation to the in-phase added inversely modulated pilot symbol signals supplied

from the inversely modulated pilot symbol in-phase adders 51. Then, the complex adder 521 outputs the result of the complex addition to the frequency offset estimator 530. The output of the addition synthesizer 240 is expressed as complex vectors.

In the frequency offset estimator 530, the controller 539 controls a buffer memory 531, a averaging unit 253, and a angle/frequency offset converter 255 based on the symbol rate supplied through the control signal 301 from the controller 500 and the number of complex adding results for phase difference to be averaged, the angle/frequency offset conversion factor, and the validation or invalidation of the updating operation of the frequency offset supplied through the control signal 304 from the controller 500. For example, the controller 539 supplies the angle/frequency offset converter 255 with the symbol rate necessary for estimating the frequency offset. Also, the controller 539 controls the averaging unit 253 to carry out the averaging operation of the phase difference vectors supplied from the complex conjugate multiplier 252 for the number of complex adding results for the phase difference supplied through the control signal 304. The averaging operation

may be a simple summation averaging operation, a moving averaging operation, or a leak factor based averaging operation. Further, the controller 539 supplies the angle/frequency offset converter 255 with the symbol rate of the concerned channel supplied through the control signal 301 for conversion of the angular data per symbol into a frequency offset per the symbol rate. Also, the controller 539 has a function to retrain the output of the angle/frequency offset converter 255 based on the validation or invalidation of the updating operation of the frequency offset supplied through the control signal 304.

When the path searching unit 260 finds no effective path, the fact of no effective path is informed by a signal 303 from path searching unit 260 to the controller 500. The controller 500 then delivers the controls signals 301 and 304 to the controller 539 such that the averaging operation of the averaging unit 253 is stopped in response to the control by the controller 539. The controller 539 determines whether the averaging operation is to be carried out and which type of the averaging operation is carried out in the averaging unit 253.

The phase difference vector averaged by the

It should be noted that when no effective path is found by the path searching unit 260, the transfer of the frequency offset expression to the TCXO controller 270 is stopped. In response to the control signals 301 and 304 of the controller 500, the controller 539 supplies the averaging unit 253 with instructions of the number of vectors to be averaged and the validation or invalidation of the averaging operation and the angle/frequency offset converter 255 with the symbol rate data, the in-phase summing pattern, and the validation or

It should be noted that when no effective path is found by the path searching unit 260, the transfer of the frequency offset expression to the TCXO controller 270 is stopped. In response to the control signals 301 and 304 of the controller 500, the controller 539 supplies the averaging unit 253 with instructions of the number of vectors to be averaged and the validation or invalidation of the averaging operation and the angle/frequency offset converter 255 with the symbol rate data, the in-phase summing pattern, and the validation or

invalidation of the frequency offset output.

The in-phase adder 511 will be now described in more detail with reference to Figs.

8A to 8E. As shown in Fig. 8A, the symbol rate

5 over the channel is supposed to be F_s . It is also assumed that the rectangular box denoted by "pilot symbol" in Fig. 8A is a complex vector received from the pilot symbol inversely demodulating unit 233.

10 As shown in Fig. 8B, in the conventional method, complex conjugate multiplication is carried out to the complex vectors for every symbol rate F_s . In this case, complex conjugate multiplication is carried out to the complex
15 vectors for every symbol period ($1/F_s$). On the other hand, according to the present invention, the complex vectors received from the pilot symbol inversely demodulating unit 233 are in-phase summed over an interval longer than one
20 symbol period for the symbol rate. For example, as shown in Fig. 8C, an in-phase addition unit is composed of three pilot symbol intervals for three symbol periods ($3/F_s$) and the complex vectors for three pilot symbol are in-phase added.
25 Similarly, Figs. 8D and 8E illustrate that the complex vectors in two symbol periods ($2/F_s$) corresponding to two pilot symbol intervals are

in-phase added. In this way, the complex vectors are in-phase added over an interval longer than the symbol periods. The in-phase addition result is used to calculate complex conjugate

5 multiplication for determining the frequency offset. Therefore, the S/N ratio of the complex vector can significantly be improved.

Assuming that the variance of noises contained in the complex vector is σ^2 , the
10 variance contained in the complex conjugate multiplication is σ^4 which is second power of σ^2 . In this case, the variance of the noise is $2 \times \sigma^4 \div 3$ when the results of the complex conjugate multiplication shown in Fig. 8B are averaged. On
15 the other hand, the variance contained therein is $\sigma^2/2$ when the complex conjugate multiplication is carried out using the structure shown in Fig. 8C, and the variance is much smaller. Therefore, in the system in which a phase difference between
20 the complex vectors is calculated using the complex conjugate multiplication, it is necessary to improve the S/N ratio in the complex vector in order to increase the accuracy of estimation of the frequency offset. The embodiment of the
25 present invention is advantageous over the conventional method in this aspect.

The in-phase summing pattern generator 512

has a function to receive the in-phase summing pattern and the number of symbols to be in-phase summed from the adder controller 519. Also, the in-phase summing pattern generator 512 has a
5 function to control the in-phase adder 511 and the buffer memory 513 to carry out the in-phase summation shown in any of Figs. 8C to 8E. More particularly, the in-phase summing pattern generator 512 operates in response to the
10 instruction from the controller 519 which has received the control signal 304 from the controller 500. The complex vectors stored in the buffer memory 531 in the frequency offset estimator 530 are outputted to a complex
15 conjugate multiplier 252 in response to an instruction from the controller 539 as shown in Figs. 8C to 8E. The complex conjugate multiplier 252 calculates the phase difference vectors to output to an averaging unit 253.

20 It should be noted that the adjacent complex vectors are selected and used for calculating a phase difference vector as shown in Figs. 8A to 8E. However, the complex vectors are not limited to them. For example, consider a case
25 that there are eight pilot symbols in Figs. 8A to 8E and the in-phase summation unit is over five symbol intervals in Fig. 8C. In this case, the

number of sets of complex vectors to be used for complex conjugate multiplication is four. Accordingly, it may be possible to carry out complex conjugate multiplication to the first
5 complex vector and the fourth complex vector for calculating a phase difference vector. However, it is necessary to divide the angular data by three, when the frequency offset per symbol is calculated in an angle/frequency offset converter
10 255. In this embodiment, the "three" is termed an angle/frequency offset conversion factor. This control is carried out by the controller 539.

The TCXO controller 270 determines the voltage applied to a TCXO unit 200 according to
15 the frequency offset received from the frequency offset estimator 250. More particularly, the control voltage corresponding to the frequency offset is determined using the table supplied through the control signal 302 from the
20 controller 500. At this time, the TCXO control voltage is selected to have such a value that the frequency offset is compensated. The control voltage determined by the TCXO controller 270 is a digital value and hence is converted to an
25 analog value by a D/A converter 105 and then is transmitted via an LPF 102 to the TCXO unit 200.

The first local frequency generator 202 and

the second local frequency generator 203 receive
a reference local frequency signal from the TCXO
200 with a temperature compensating circuit. The
first local frequency generator 202 generates the
5 first local frequency signal which is generated
by shifting the frequency of the carrier signal
received from the transmitter by the IF frequency.
The second local frequency generator 203
generates the second local frequency signal which
10 has the IF frequency.

In the embodiment of the present invention,
the number of pilots symbols to be in-phase
summed for calculating the frequency offset is
calculated over an interval longer than the
15 symbol interval. However, if desired, the number
of the symbol intervals to be summed may be one.
For example, when the symbol rate is
significantly small, the frequency offset may be
determined using only the pilot symbols as in the
20 conventional method. Such control is carried out
by the controller 500 shown in Fig. 5.

It should be noted that a case where only
two inversely spreading units are provided is
described in the above embodiment. However, three
25 or more inversely spreading units may be used. In
this case, it is preferable that the inverse
spreading signal for multiplication can be

As set forth above, according to the present invention, in the CDMA system having a frame format in which pilot symbols and data symbols are time multiplexed and transmitted, and a spreading rate which is made variable under a constant chip rate, to realize the variable transmission symbol rate, the pilot symbols are in-phase summed over an interval longer than symbol periods on the channel so that the S/N ratio in the complex vector used for calculating a frequency phase difference can be improved, resulting in providing an automatic frequency controlling apparatus which can carry out more accurate the estimation of the frequency offset than the conventional method.

As set forth above, according to the present invention, in the CDMA system having a frame format in which pilot symbols and data symbols are time multiplexed and transmitted, and a spreading rate which is made variable under a constant chip rate, to realize the variable transmission symbol rate, the pilot symbols are in-phase summed over an interval longer than symbol periods on the channel so that the S/N ratio in the complex vector used for calculating a frequency phase difference can be improved, resulting in providing an automatic frequency controlling apparatus which can carry out more accurate the estimation of the frequency offset than the conventional method.

1. A receiver for a code division multiple access system comprising:

a pilot symbol producing section which produces pilot symbols of complex vector expression from a received radio frequency (RF) signal based on a first local frequency signal and a second local frequency signal, wherein said first local frequency signal has a frequency obtained by shifting a frequency of a carrier signal by an IF frequency and said second local frequency signal has a frequency equal to said IF frequency, and said pilot symbols have been subjected to inverse modulation to remove a modulation component;

a frequency offset estimating section which
15 carries out in-phase adding operations to said pilot
symbols of said complex vector expression over a
predetermined interval in accordance with a
predetermined pattern, carries out a complex adding
operation of results of said in-phase adding
20 operations, and determines a frequency offset from a
result of said complex adding operation; and

a local signal generating section which generates said first and second frequency signals based on said determined frequency offset.

2. The receiver according to claim 1, wherein said

predetermined interval is an interval longer than one symbol period.

3. The receiver according to claim 1, wherein said pilot symbol producing section orthogonally demodulates said RF signal into an in-phase component and an orthogonal component, and produces a channel count data indicative of a number of effective channels from said in-phase component and said orthogonal component based on a spreading code, a symbol rate and a pilot symbol interval, and

wherein said receiver further comprises:

10 a control unit which generates an addition
count data indicative of the number of pilot symbols
to be added and an in-phase summing pattern, and

wherein said frequency off set estimating
section determines said predetermined interval and
15 said predetermined pattern based on said addition
count data and said in-phase summing pattern.

4. The receiver according to claim 1, wherein said frequency off set estimating section includes:

an in-phase adding section which carries out
said in-phase adding operations to said pilot symbols
of said complex vector expression over said
predetermined interval in accordance with said
predetermined pattern;

an addition synthesizing section which carries out said complex adding operation of the results of

10 said in-phase adding operations; and

a frequency offset estimating unit which determines said frequency offset from said result of said complex adding operation.

5. The receiver according to claim 4, wherein said in-phase adding section includes a plurality of in-phase adding units, each of which includes:

a buffer memory which stores said pilot symbols
5 of said complex vector expression;

a control section which generates said predetermined interval and said predetermined pattern based on an addition count data indicative of a number of pilot symbols to be added and an in-phase summing
10 pattern; and

an in-phase adder which reads out said pilot symbols of said complex vector expression from said buffer based on over said predetermined interval and said predetermined pattern, and carries out said in-
15 phase adding operation to said read out pilot symbols of said complex vector expression.

6. The receiver according to claim 4, wherein said addition synthesizing section includes:

a complex adder which carries out said complex

5 adding operations.

a buffer memory which stores said result of
said complex adding operation;

```

                an averaging unit which carries out an
10  averaging operation to said phase difference vectors;

```

a converter which converts said angle value to said frequency offset based on a symbol rate.

producing pilot symbols of complex vector
5 expression from a received radio frequency (RF) signal
based on a first local frequency signal and a second
local frequency signal, wherein said first local
frequency signal has a frequency obtained by shifting
a frequency of a carrier signal by an IF frequency and

determining a frequency offset from said pilot
15 symbols of said complex vector expression through in-
phase adding operations to said pilot symbols of said
complex vector expression over a predetermined
interval based on a predetermined pattern; and

9. The method according to claim 8, wherein said predetermined interval is an interval longer than one symbol period.

orthogonally demodulating said RF signal into
an in-phase component and an orthogonal component; and

10 wherein said method further comprises:
 generating said addition count data indicative

wherein said determining a frequency offset

15 includes:

11. The method according to claim 8, wherein said producing includes:

carrying out said complex adding operation of
the results of said in-phase adding operations; and
determining said frequency offset from said
10 result of said complex adding operation.

```

        storing said pilot symbols of said complex
vector expression in a buffer memory for every in-
5 phase adding operation;

```

generating said predetermined interval and said predetermined pattern based on an addition count data indicative of a number of pilot symbols to be added

10 reading out said pilot symbols of said complex
vector expression from said buffer based on over said
predetermined interval and said predetermined pattern,
to carry out said in-phase adding operation to said
read out pilot symbols of said complex vector
15 expression.

carrying out said complex adding operation of the results of said in-phase adding operations.

storing said result of said complex adding
operation in a buffer memory;

```

        carrying out an averaging operation to said
10  phase difference vectors;

```

```

        converting said angle value to said frequency
offset based on a symbol rate.

```

5 for transmission and in which a variable transmission
symbol rate is realized by making a spreading rate
variable under a constant chip rate, comprising:

in-phase summing in at least two different in-phase summation rates the pilot symbols having a complex vector expression over a predetermined length of a symbol interval after converting the pilot symbols into the complex vector expression by canceling a data modulated component of the pilot symbols; and

15 estimating a frequency offset based on a result
of conjugate complex multiplication of a plurality of
said complex vector expressions which are subjected to
the in-phase addition.

16. An automatic frequency controlling method according to claim 15, further comprising:

controlling an oscillation frequency of a
crystal oscillator in accordance with an estimation of
5 the frequency offset calculated through the estimation
of the frequency offset;

converting the received frequency signal into
an intermediate frequency signal in accordance with

10 orthogonally demodulating the intermediate
frequency signal based on the oscillation frequency.

obtaining a baseband signal having an in-phase component and an orthogonal component through the
5 orthogonal modulation and converting into digital signals by A/D converters, respectively;

```

10      converting the pilot symbols into complex
      vector expressions by canceling the data modulated
      components of the pilot signals.

```

an orthogonal demodulator converting a received
signal into a baseband signal having an in-phase
10 component and an orthogonal component;

an estimating section estimating the frequency
offset from conjugate complex multiplication of a
25 plurality of said complex vector expressions which are
subjected to the in-phase summation.

19. An automatic frequency controlling system according to claim 18, wherein the in-phase summing section in-phase summing in at least two different manners comprises:

5 a buffer memory storing the symbols over at least two symbol intervals of the complex vector signal received from the demodulator; and

an in-phase adder in-phase summing the outputs
of the buffer memory, and
10 the estimating section estimating the frequency

a complex adder summing the outputs of the in-phase adders which correspond to the in-phase components and the orthogonal components of the base band signal;

a conjugate complex multiplier storing the sum in a second buffer memory and carrying out conjugate complex multiplication to outputs of the second buffer memory; and

20 an angle/frequency offset converter averaging
and converting outputs of the conjugate complex
multiplier into angular components, and converting the
angular components into frequency components to
estimate a frequency offset.

20. An automatic frequency controlling system according to claim 18, further comprising:

a controlling section controlling the oscillation frequency of a crystal oscillator in accordance with an estimation of the frequency offset obtained through the estimation of the frequency offset; and

a converting section converting the received
frequency signal into an intermediate frequency signal
10 in accordance with the oscillation frequency,

wherein the intermediate frequency signal is
orthogonally demodulated using the oscillation

frequency.

21. A CDMA receiver in a code division multiple access system using a spectrum spreading technique which has a frame format in which pilot symbols and data symbols are time multiplexed for transmission and
5 in which a variable transmission symbol rate is realized by making a spreading rate variable under a constant chip rate, comprising:

a mixer for converting a received frequency signal into an intermediate frequency signal;

10 a first local frequency generator supplying the mixer with a local oscillation signal;

an orthogonal demodulator for orthogonally demodulating the intermediate frequency signal in accordance with a second local frequency of a second
15 local frequency generator;

inversely spreading units converting in-phase components and orthogonal components of the baseband signal received from the orthogonal demodulator into analog/digital signals;

20 pilot symbol demodulators separating the inversely spread signal outputted from the inversely spreading units into pilot symbols and data symbols, and converting the pilot symbols into complex vector expressions by canceling the data modulated components
25 of the pilot symbols;

inversely demodulated pilot symbol in-phase
adders for in-phase summing in at least two different
manners, the complex vector expressions of the pilot
symbols over a predetermined length of the symbol

```
30  section;
```

a frequency offset estimator estimating the frequency offset based on conjugate complex multiplication of a plurality of said complex vector expressions which are subject to the in-phase

35 summation; and

a reference local frequency generator
generating a reference local frequency based on the
frequency offset and delivering the reference local
frequency to the first and second local frequency

40 generators.

A receiver for a code division multiple access system includes a pilot symbol producing section, a frequency offset estimating section and a local signal generating section. The pilot symbol producing section produces pilot symbols of complex vector expression from a received radio frequency (RF) signal based on a first local frequency signal and a second local frequency signal. The first local frequency signal has a frequency obtained by shifting a frequency of a carrier signal by an IF frequency and the second local frequency signal has a frequency equal to the IF frequency. The pilot symbols have been subjected to inverse modulation to remove a modulation component. The frequency offset estimating section carries out in-phase adding operations to the pilot symbols of the complex vector expression over a predetermined interval in accordance with a predetermined pattern. Then, the frequency offset estimating section carries out a complex adding operation of results of the in-phase adding operations, and determines a frequency offset from a result of the complex adding operation. The local signal generating section generates the first and second frequency signals based on the determined frequency offset.

Fig. 1 PRIOR ART

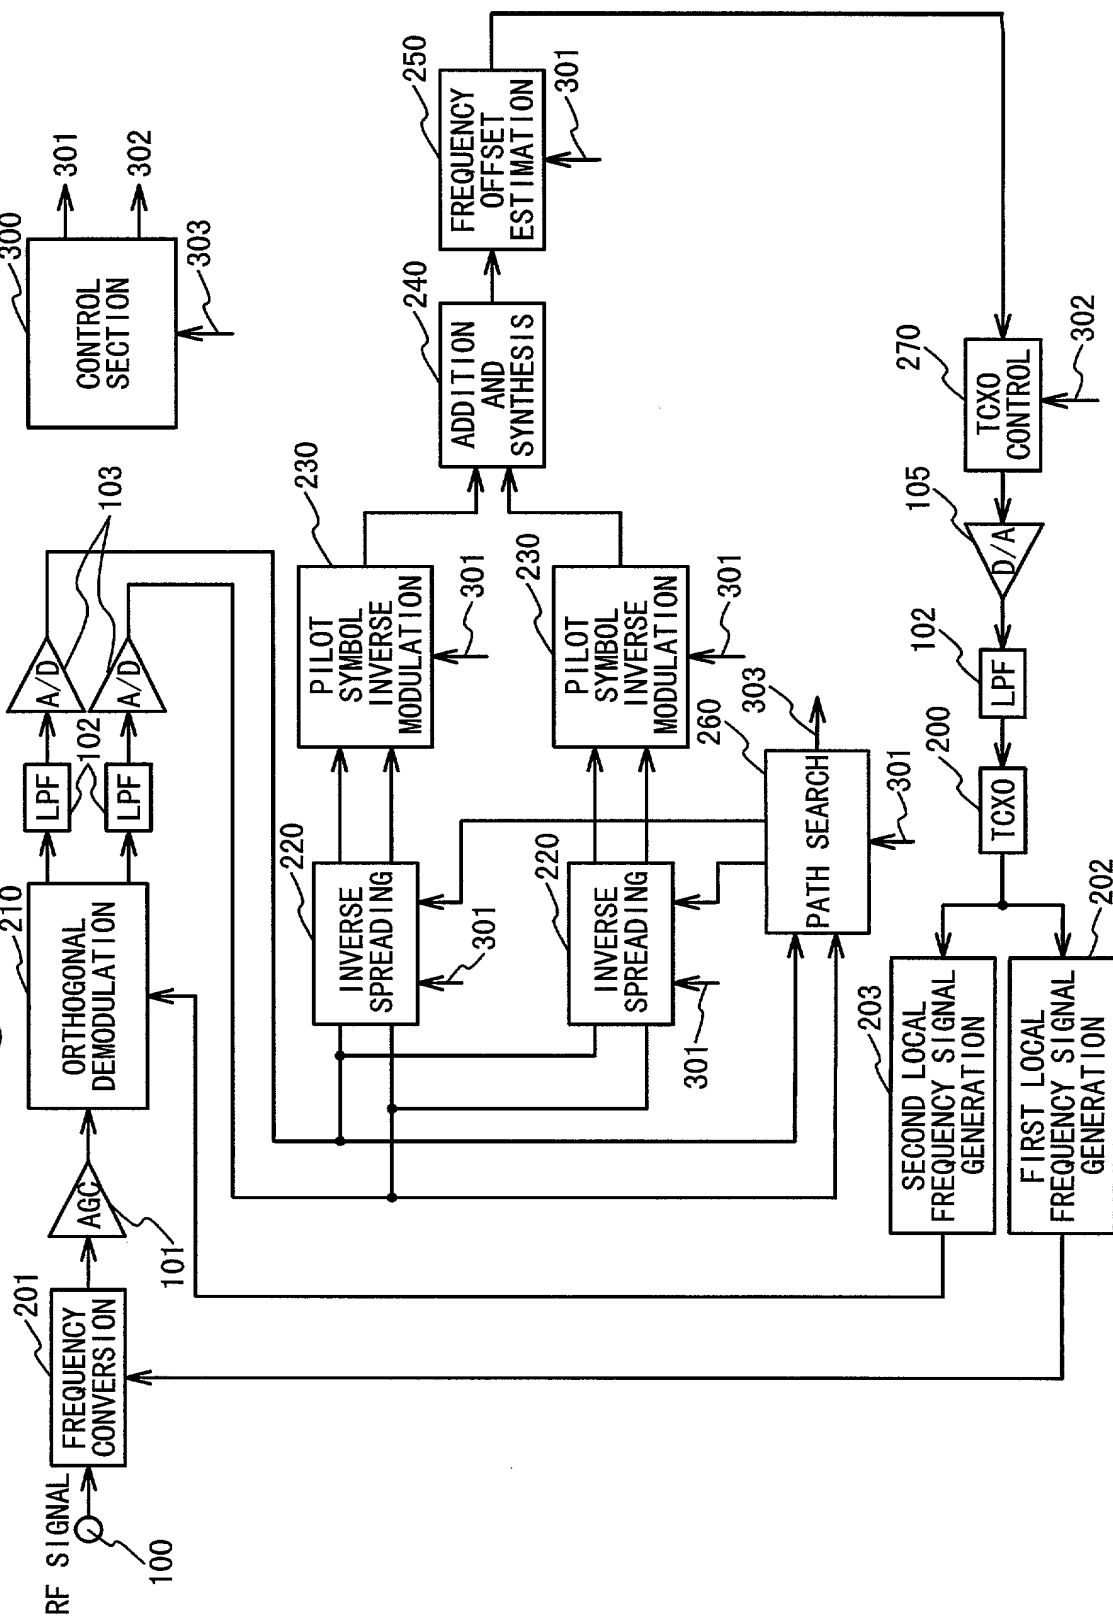


Fig. 3A
PRIOR ART


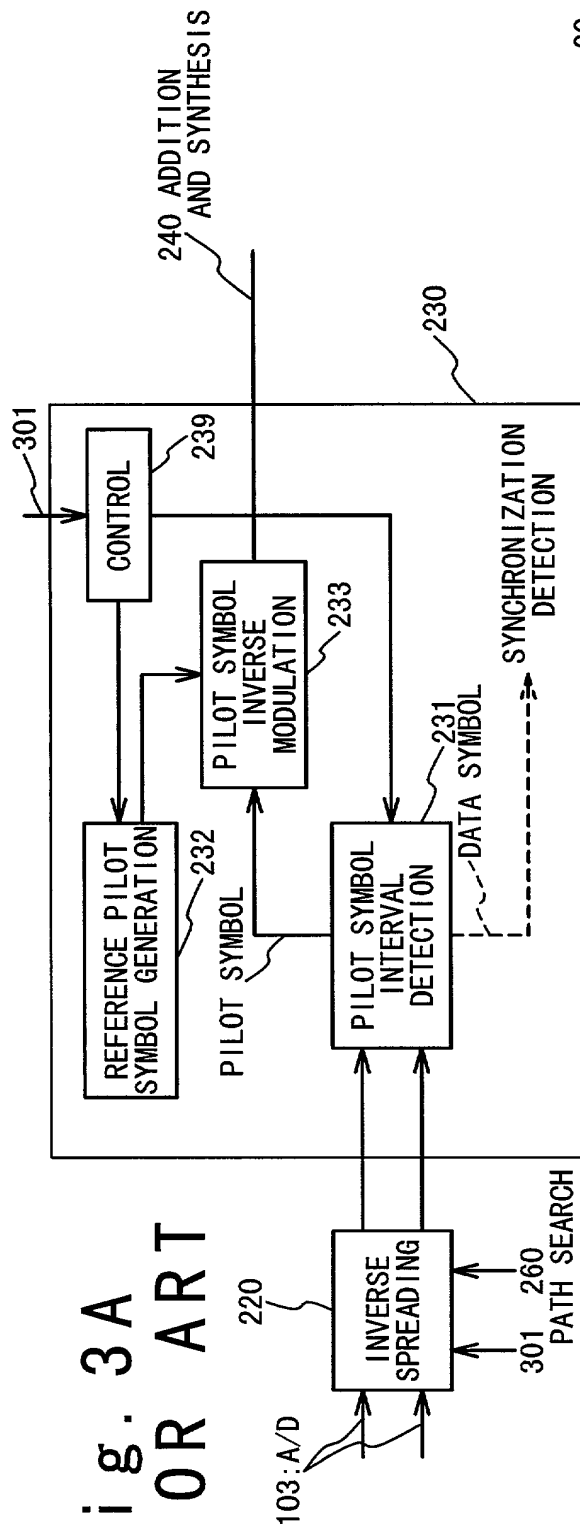


Fig. 3B
PRIOR ART

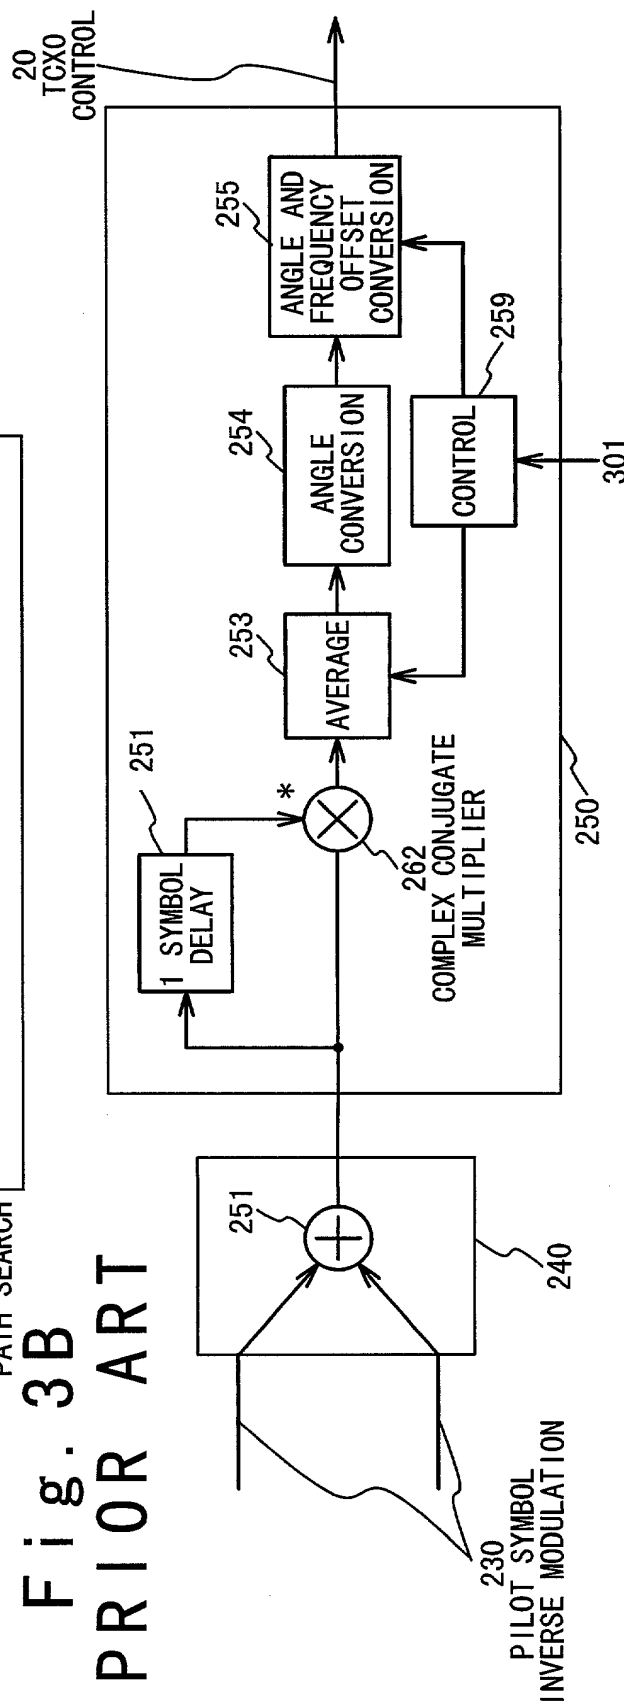

RF SIC

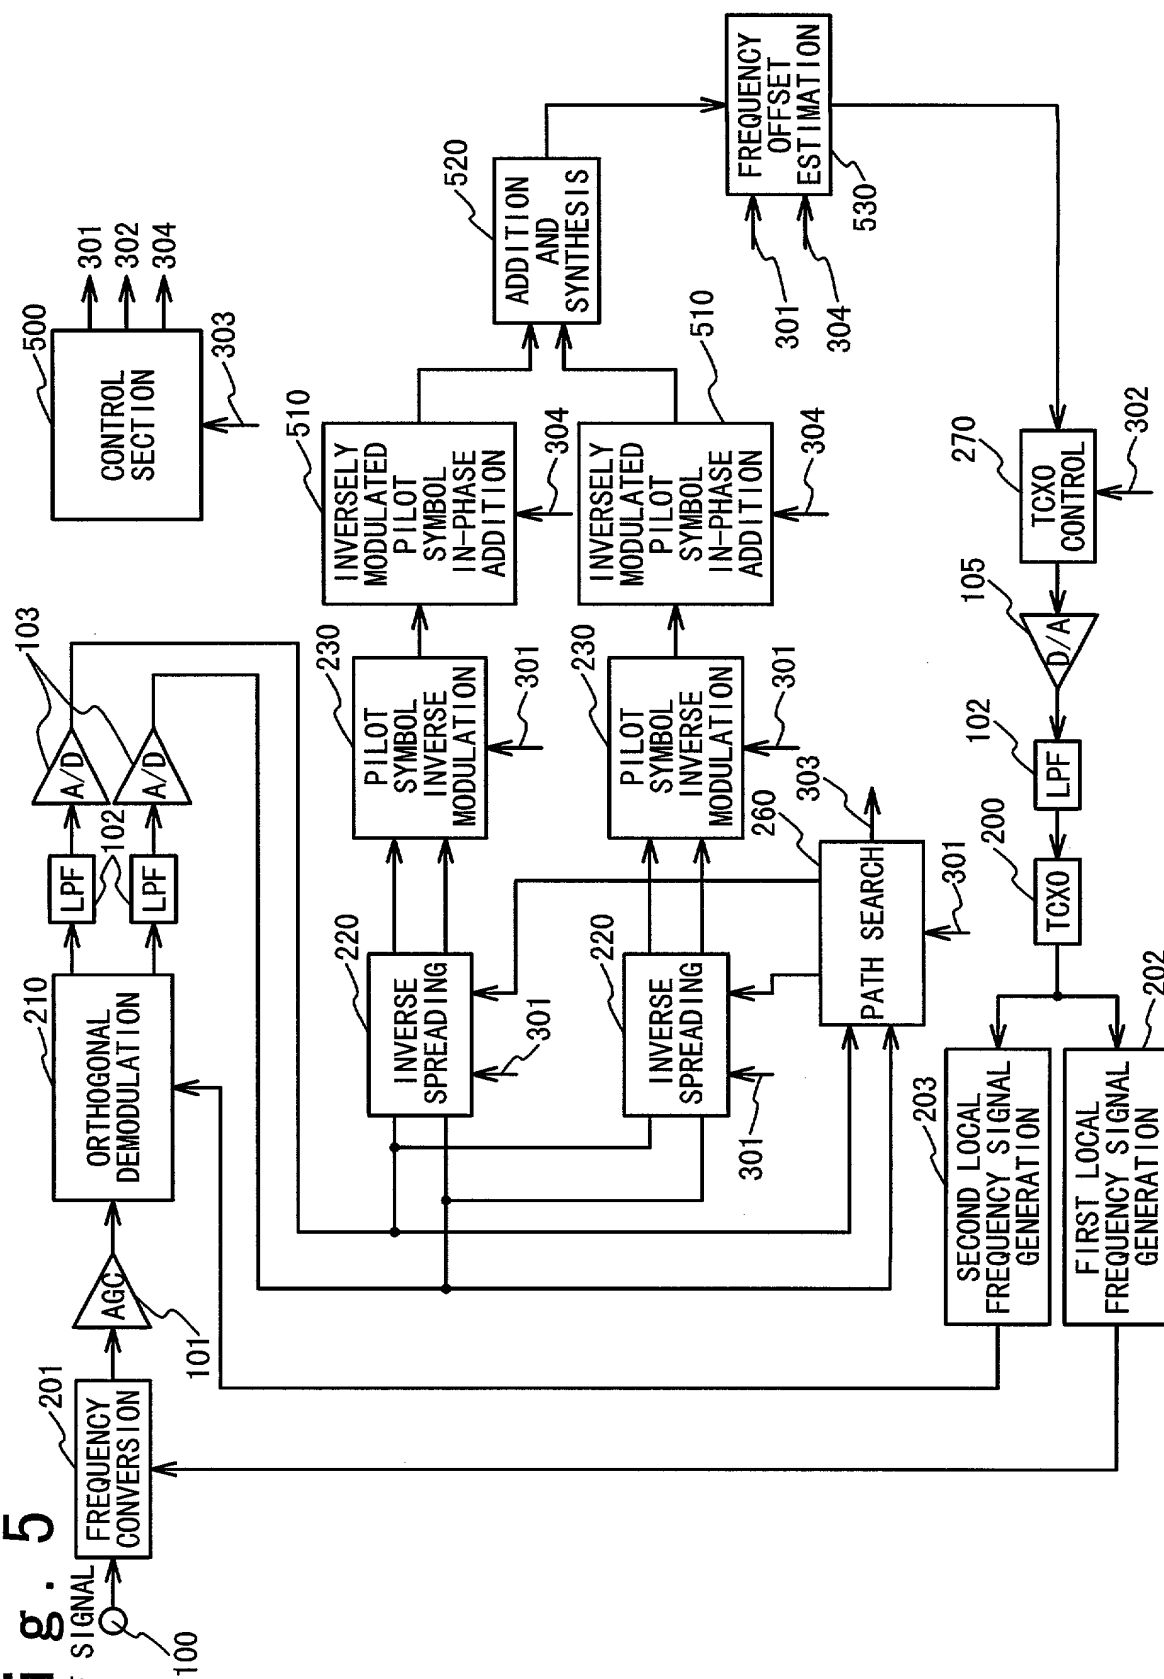


Fig. 6

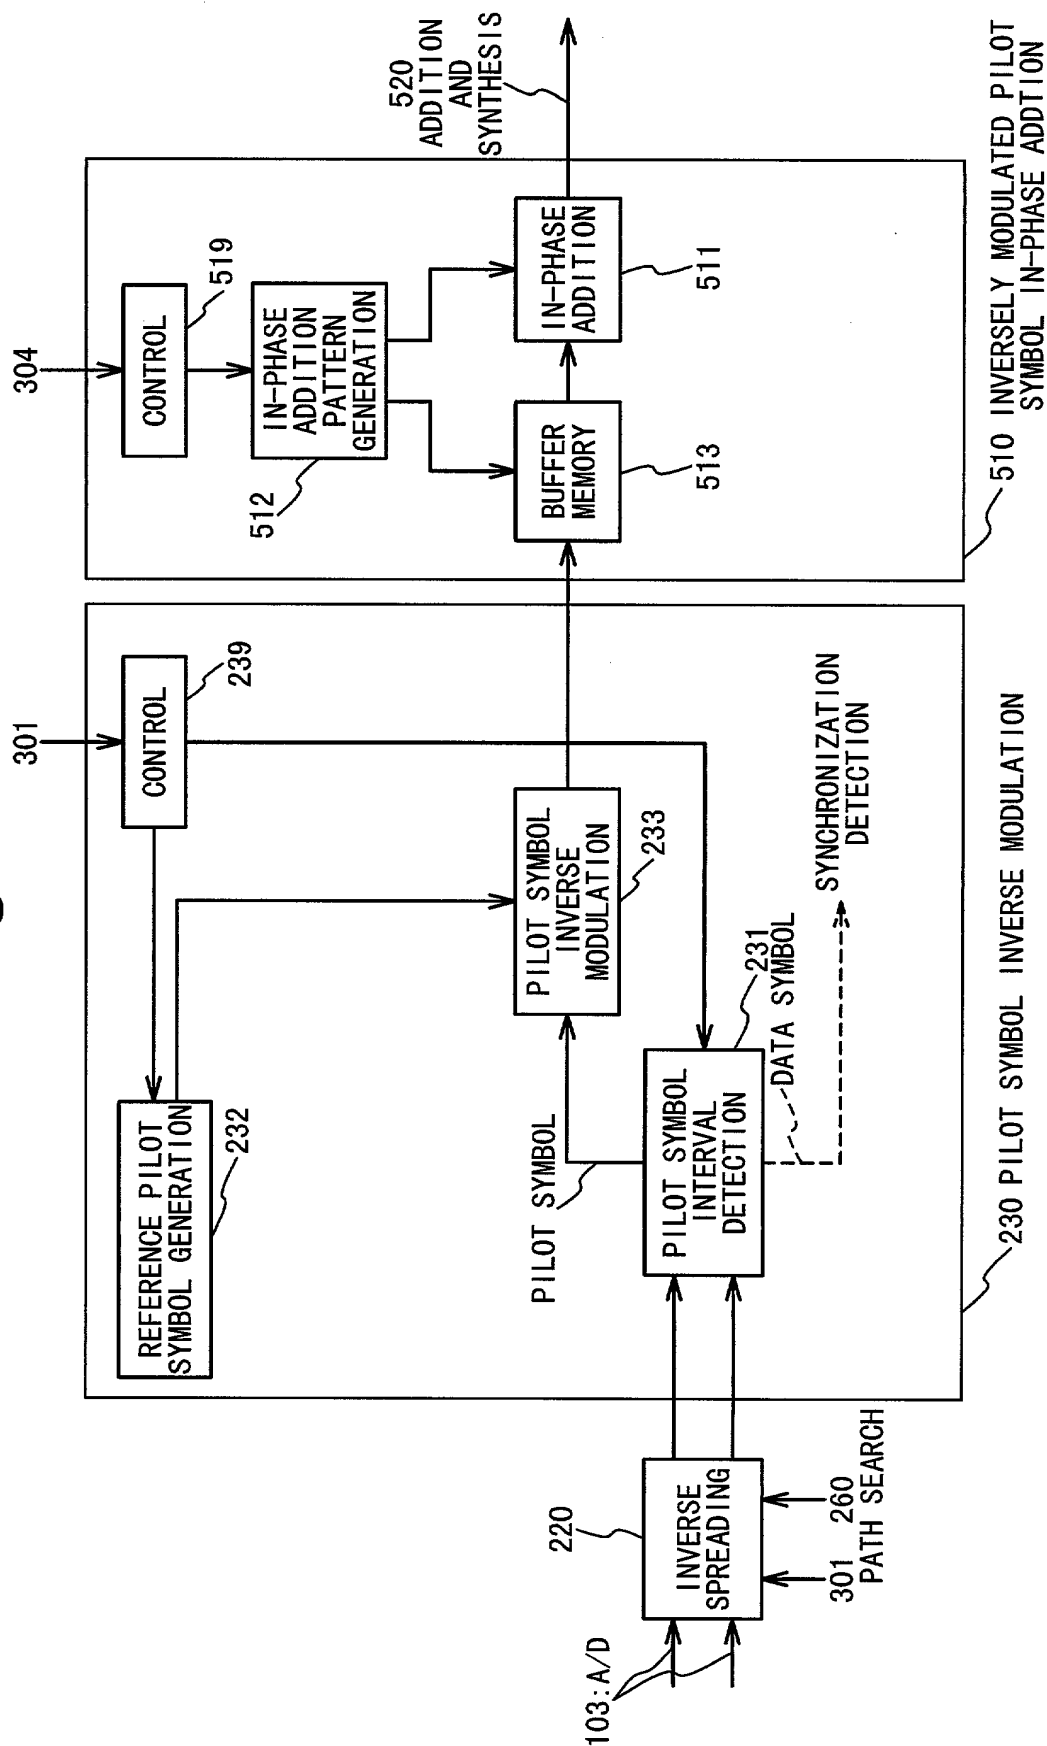


Fig. 7

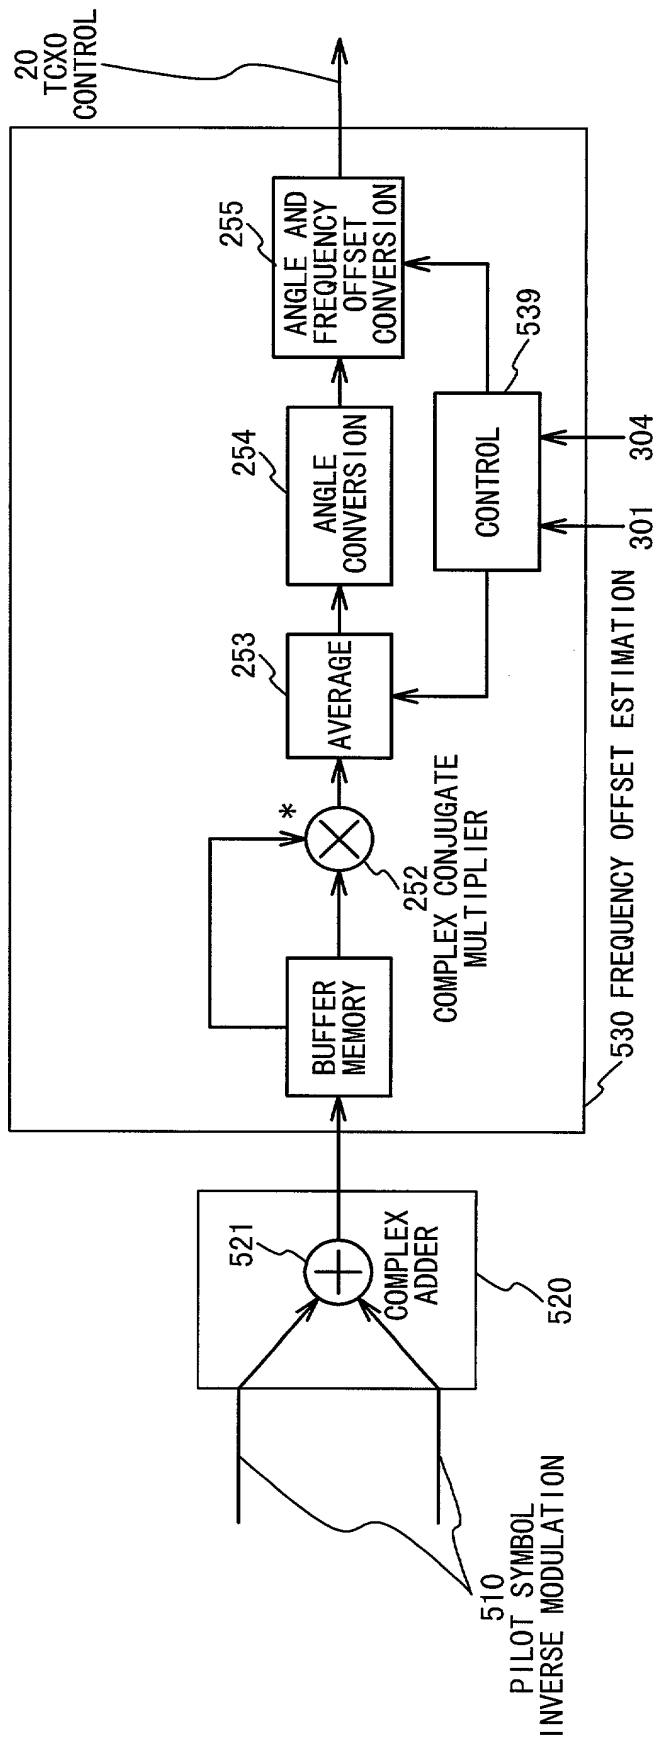



Fig. 8A (SYMBOL RATE = F_s)

Fig. 8B IN-PHASE ADDITION RATE = F_s (CONVENT.)

Fig. 8C IN-PHASE ADDITION RATE = $F_s/3$

Fig. 8D IN-PHASE ADDITION RATE = $F_s/2$

Fig. 8E IN-PHASE ADDITION RATE = $F_s/2$

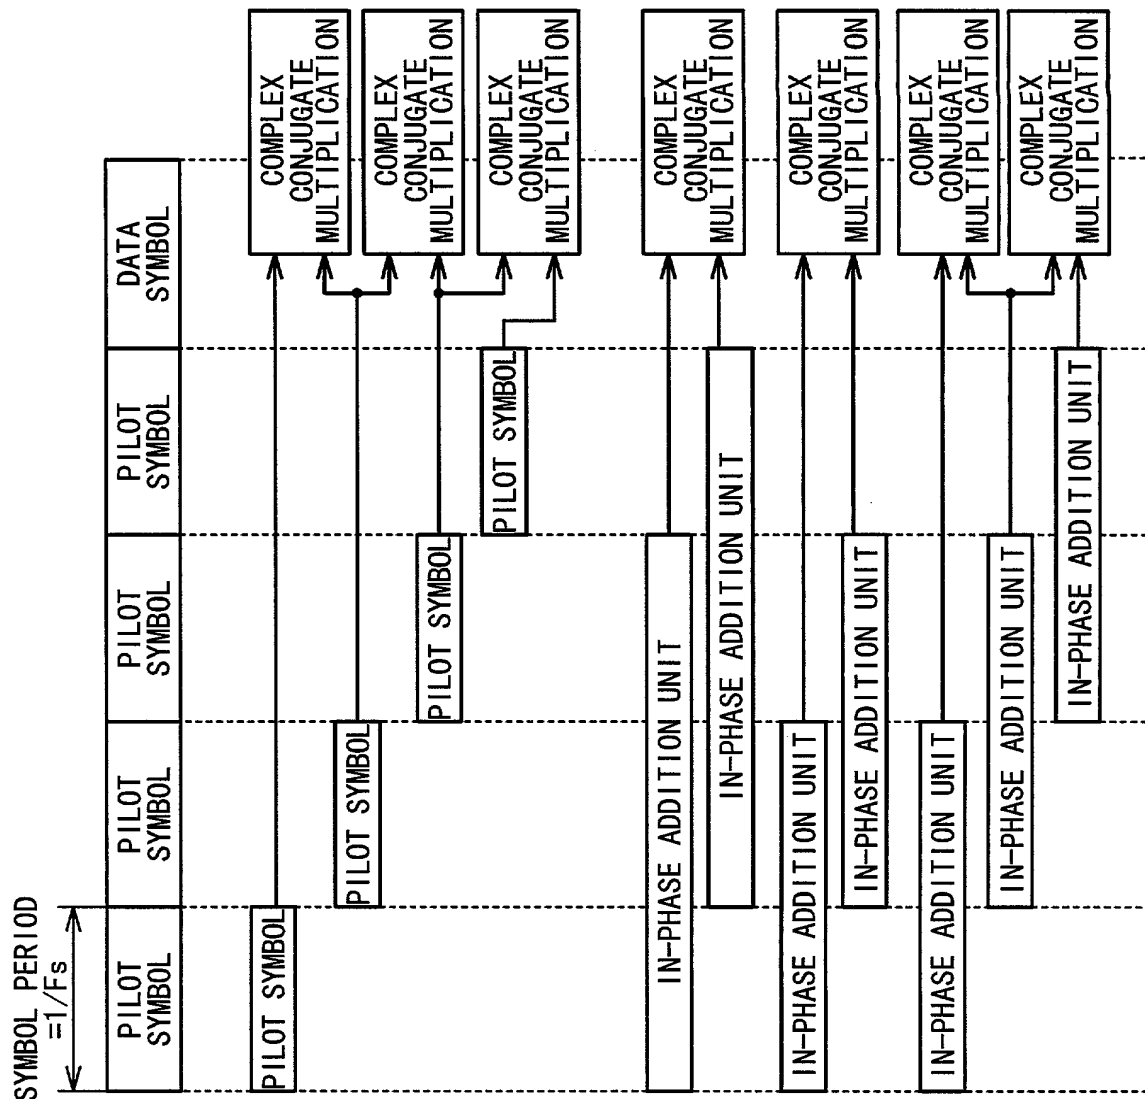

UNITED STATES OF AMERICA
COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

OFGS FILE NO.
P/2635-48

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:
CDMA RECEIVER CAPABLE OF ESTIMATION OF FREQUENCY OFFSET IN HIGH PRECISION

the specification of which is attached hereto, unless the following box is checked:

☐ was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign or Provisional Application(s)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	184099/1999	29/06/1999	YES <u>X</u> NO _____
			YES _____ NO _____
			YES _____ NO _____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)


I hereby appoint OSTROLENK, FABER, GERB & SOFFEN, and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,625, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.

SEND CORRESPONDENCE TO:


OSTROLENK, FABER, GERB & SOFFEN
1180 AVENUE OF THE AMERICAS
NEW YORK, NEW YORK 10036-8403

DIRECT TELEPHONE CALLS TO:
(212) 382-0700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR SHIGERU ONO		INVENTOR'S SIGNATURE 	DATE June 13, 2000
RESIDENCE Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan	
POST OFFICE ADDRESS c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan			
FULL NAME OF SECOND JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF THIRD JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

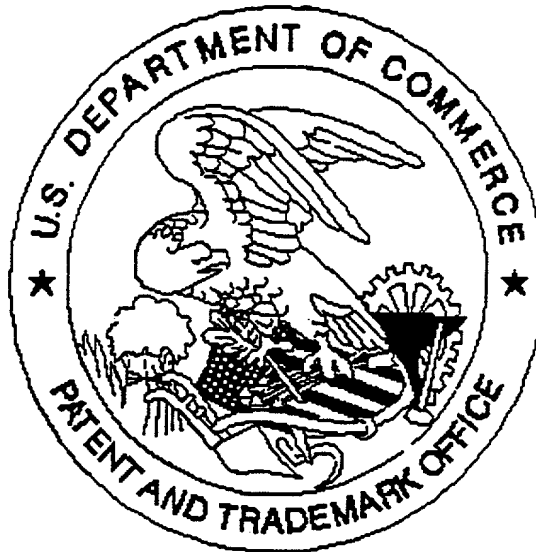

Application deficiencies were found during scanning:

☐ Page(s) 2 of declaration were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Scanned copy is best available.

008290-0640960